



Classic™ Premium



The Acoustic Leader in Vertically Folding Retractable Walls


Classic™ Premium

Designed to solve acoustic challenges in complex architectural spaces, with sleek ceiling closure panels for a seamless finish.

The main difference between the Classic Series and Classic Premium is the latter's built-in closure panels, which hide the ceiling pocket for a seamless look. When lowered, Classic Premium acts as a fixed wall, appearing as a permanent architectural element.

ADVANTAGES

- Retracts into the ceiling to maximize floor space
- Maximum sound isolation (STC 60 / RW 59)
- Width: Unlimited
- Height: Maximum height 34 feet (10.360m)
- No floor, wall tracks or visible hinges
- Fully automatic
- Digital keypad operation (included)
- Quiet operation
- Lightweight panels
- Flat and rigid
- Cost-effective and lightweight structure
- Variety of finish options
- Can be used in stepped or sloped spaces
- Equipped with a safety obstruction sensor
- Variety of finish options

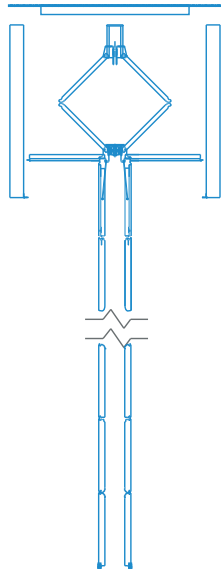

Classic™ Premium



CLASSIC PREMIUM SERIES

IMPERIAL

DIMS FOR STANDARD DRIVE SYSTEM - PANELS ≤ 26.5625"

FINISHED CEILING "A"	BEAM HEIGHT "B"	POCKET WIDTH "C"	PANEL HEIGHT "D"	NUMBER OF PANELS HIGH	WALL THICKNESS	TOP SEAL (FIXED N/A)	FLOOR SEAL	MAX PANEL LENGTH			
								CLASSIC 51	CLASSIC NR	CLASSIC 55	CLASSIC 60
14' - 1" 14' - 6" 15' - 0" 15' - 6" 15' - 11"	17' - 1.5" 17' - 6.75" 18' - 0.5" 18' - 6.75" 19' - 0"	60.125 61.625 63.25 65 66.5	23.3125 24.0625 24.875 25.75 26.5	"7 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	12'
16' - 0" 16' - 6" 17' - 0" 17' - 6" 18' - 0" 18' - 1"	19' - 6.5" 20' - 0.5" 20' - 6.5" 21' - 0.5" 21' - 6.5" 21' - 7.5"	60.25 61.75 63.25 64.75 66.25 66.5	23.375 24.125 24.875 25.625 26.375 26.5	"8 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	12'
18' - 2" 18' - 6" 19' - 0" 19' - 6" 20' - 0" 20' - 5"	21' - 8.375" 22' - 0.25" 22' - 6.5" 23' - 0.25" 23' - 6.25" 23' - 11.5"	60.5 61.375 62.75 64 65.375 66.5	23.5 23.9375 24.625 25.625 25.9375 26.5	"9 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	12'
20' - 6" 21' - 0" 21' - 6" 22' - 0" 22' - 6" 22' - 7"	24' - 5.75" 24' - 11.625" 25' - 5.75" 26' - 0" 26' - 5.625" 26' - 7"	61.5 62.625 63.875 65.125 66.25 66.5	24 24.5625 25.1875 25.8125 26.375 26.5	"10 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	10'
22' - 8" 23' - 0" 23' - 6" 24' - 0" 24' - 6" 24' - 11"	26' - 8" 26' - 11.5" 27' - 5.75" 28' - 0" 28' - 6.125" 28' - 11"	61.625 62.25 63.375 64.5 65.625 66.5	24.0625 24.375 24.9375 25.5 26.0625 26.5	"11 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	8'
25' - 0" 25' - 6" 26' - 0" 26' - 6" 27' - 0" 27' - 1"	29' - 5.75" 29' - 11.75" 30' - 5.75" 30' - 11.75" 31' - 5.75" 31' - 6.5"	62.375 63.375 64.375 65.375 66.375 66.5	24.4375 24.9375 25.4375 25.9375 26.4375 26.5	"12 High + 1 Horizontal"	11 3/4"	0.875	2	12'	10'	10'	8'
27' - 2" 27' - 6" 28' - 0" 28' - 6" 29' - 0" 29' - 5"	31' - 7.5" 31' - 11.75" 32' - 5.5" 32' - 11" 33' - 5.5" 33' - 10.5"	62.375 63 63.875 64.75 65.75 66.5	24.4375 24.75 25.1875 25.625 26.125 26.5	"13 High + 1 Horizontal"	11 3/4"	0.875	2	10'	10'	10'	8'
29' - 6" 30' - 0" 30' - 6" 31' - 0" 31' - 6" 31' - 7"	34' - 4.625" 34' - 10.625" 35' - 4.875" 35' - 10.875" 36' - 5.125" 36' - 5.875"	62.875 63.75 64.625 65.5 66.375 66.5	24.6875 25.125 25.5625 26 26.4375 26.5	"14 High + 1 Horizontal"	11 3/4"	0.875	2	10'	8'	8'	8'
31' - 8" 32' - 0" 32' - 6" 33' - 0" 33' - 6" 33' - 11" 34' - 0"	36' - 6.75" 36' - 11.5" 37' - 5" 37' - 10.75" 38' - 5.25" 38' - 10" 38' - 11"	62.875 63.5 64.25 65 65.875 66.5 66.6250	24.6875 25 25.375 25.75 26.1875 26.5 26.5625	"15 High + 1 Horizontal"	11 3/4"	0.875	2	10'	8'	8'	8'


* Beam heights indicated may vary with wall size and motor size.
This table is not for construction purposes. Refer to shop drawings for final build to dimensions

METRIC

DIMS FOR STANDARD DRIVE SYSTEM - PANELS ≤ 675mm

FINISHED CEILING "A"	BEAM HEIGHT "B"	POCKET WIDTH "C"	PANEL HEIGHT "D"	NUMBER OF PANELS HIGH	WALL THICKNESS	TOP SEAL (FIXED N/A)	FLOOR SEAL	MAX PANEL LENGTH			
								CLASSIC 51	CLASSIC NR	CLASSIC 55	CLASSIC 60
4295 4350 4400 4550 4700 4850	5235 5290 5335 5490 5630 5790	1530 1545 1560 1605 1645 1690	593.73 601.66 608.01 630.24 650.88 673.10	"7 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	3655
4960 4900 5000 5150 5300 5450 5500 5520	6030 5980 6070 6220 6370 6525 6575 6590	1550 1535 1560 1595 1635 1675 1685 1690	603.25 596.90 608.01 627.06 646.11 665.16 671.51 673.10	"8 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	3655
5550 5600 5750 5900 6050 6200 6230	6630 6670 6830 6970 7130 7270 7300	1540 1550 1585 1615 1650 1685 1690	598.49 603.25 620.71 636.59 654.05 669.93 673.10	"9 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	3050
6240 6350 6500 6650 6800 6890	7450 7560 7720 7860 8020 8100	1560 1580 1615 1640 1675 1690	608.01 619.13 635.00 649.29 665.16 673.10	"10 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	2440
6900 7100 7250 7400 7550 7600	8110 8320 8460 8620 8760 8810	1560 1600 1625 1655 1680 1690	609.60 628.65 641.35 655.64 668.34 673.10	"11 High + 1 Horizontal"	300	22.2	50.8	3655	3050	3050	2440
7610 7700 7850 8000 8150 8260	8965 9060 9210 9365 9495 9610	1580 1595 1620 1650 1670 1690	619.13 627.06 639.76 652.46 663.58 673.10	"12 High + 1 Horizontal"	300	22.2	50.8	3050	3050	3050	2440
8270 8450 8600 8750 8900 8975	9620 9805 9950 10115 10260 10320	1580 1610 1630 1655 1680 1690	619.13 633.41 644.53 657.23 668.34 673.10	"13 High + 1 Horizontal"	300	22.2	50.8	3050	2440	2440	2440
8980 9150 9300 9450 9600 9635	10480 10655 10790 10945 11100 11120	1595 1620 1640 1665 1685 1690	627.06 639.76 649.29 660.40 671.51 673.10	"14 High + 1 Horizontal"	300	22.2	50.8	3050	2440	2440	N/A
9640 9800 9950 10100 10250 10360	11145 11310 11450 11595 11740 11860	1595 1620 1640 1655 1675 1690	627.06 638.18 647.70 657.23 666.75 674.69	"15 High + 1 Horizontal"	300	22.2	50.8	2440	2440	2440	N/A

* Beam heights indicated may vary with wall size and motor size.
This table is not for construction purposes. Refer to shop drawings for final build to dimensions

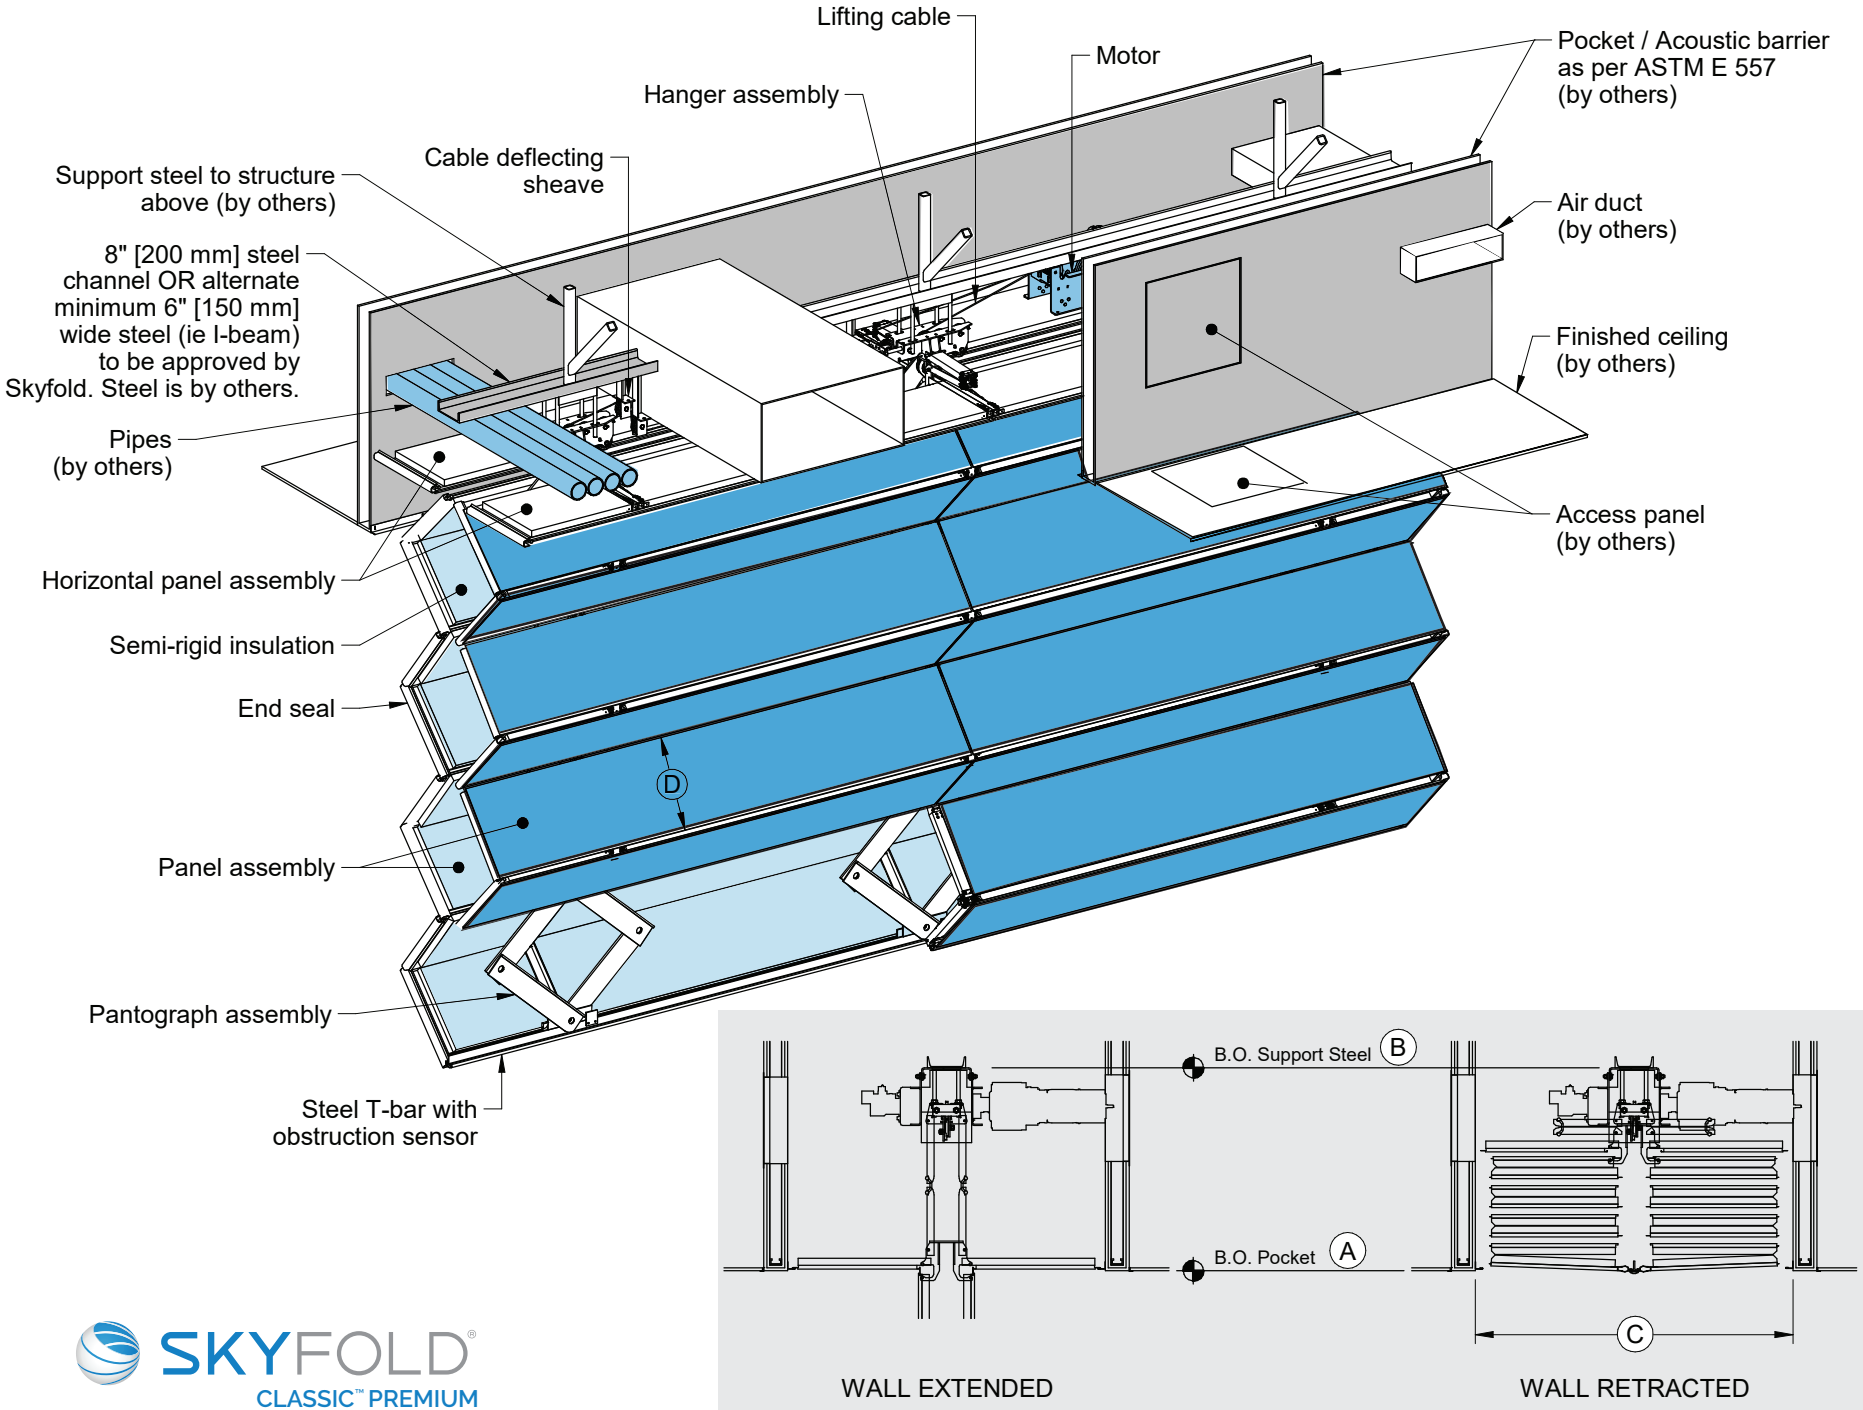



For more information visit our website or contact us directly.

MAIN OFFICE

325 Lee Avenue
Montreal, Quebec
CANADA H9X 3S3

T +1 (514) 457-4767
F +1 (514) 457-7111
info@skyfold.com
www.skyfold.com



EO1/2026

Recycled materials: Up to 97%
Post-consumer: Up to 27%
Pre-consumer: Up to 51%

SKYFOLD®, SKYFOLD® Classic™, SKYFOLD Zenith® and SKYFOLD Mirage® are registered trademarks of Skyfold Inc. and Skyfold Investments Ltd.

Skyfold is pleased to be an official member of the U.S. Green Building Council. The Green Council is committed to promoting better designed buildings that are not only more environmentally and socially responsible, but also help improve the quality of life for those who occupy them and the communities in which they are built. The Council has developed a benchmarking system known as LEED (Leadership in Energy & Environmental Design). When it comes to recycled materials, architects and owners who choose a Skyfold vertically folding operable wall system can calculate the following toward LEED accreditation on their projects. In order to continue protecting our environment, it is essential that we all do our part by using recycled materials whenever possible. Skyfold is proud to help.